




Note: For Door Models visit : <http://www.obe.com/products/entrances/swing-entrances/standard-ns-212ms-375ws-500-door-and-frame>

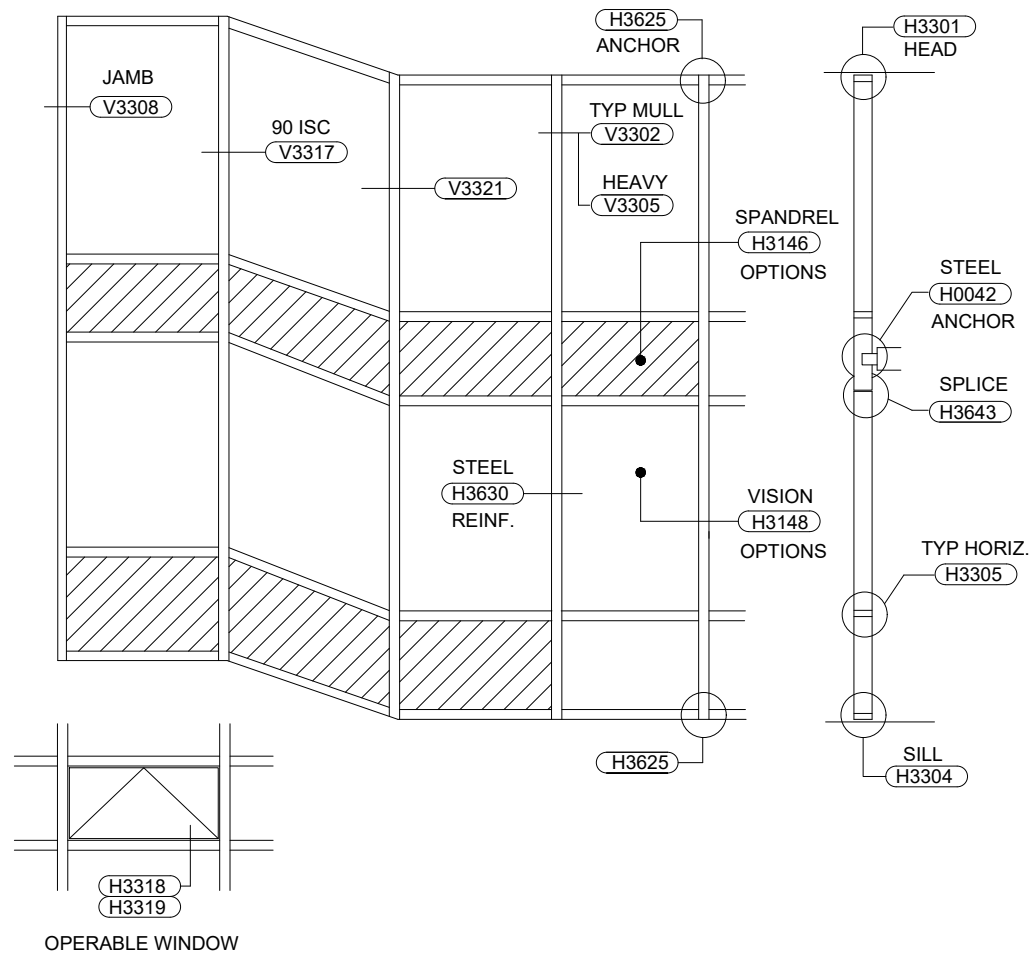


## Reliance™ Curtain Wall w/ FRP Pressure Plate 2-1/2" x 10-3/8" w/ 1" Typ. Infill - Elevation

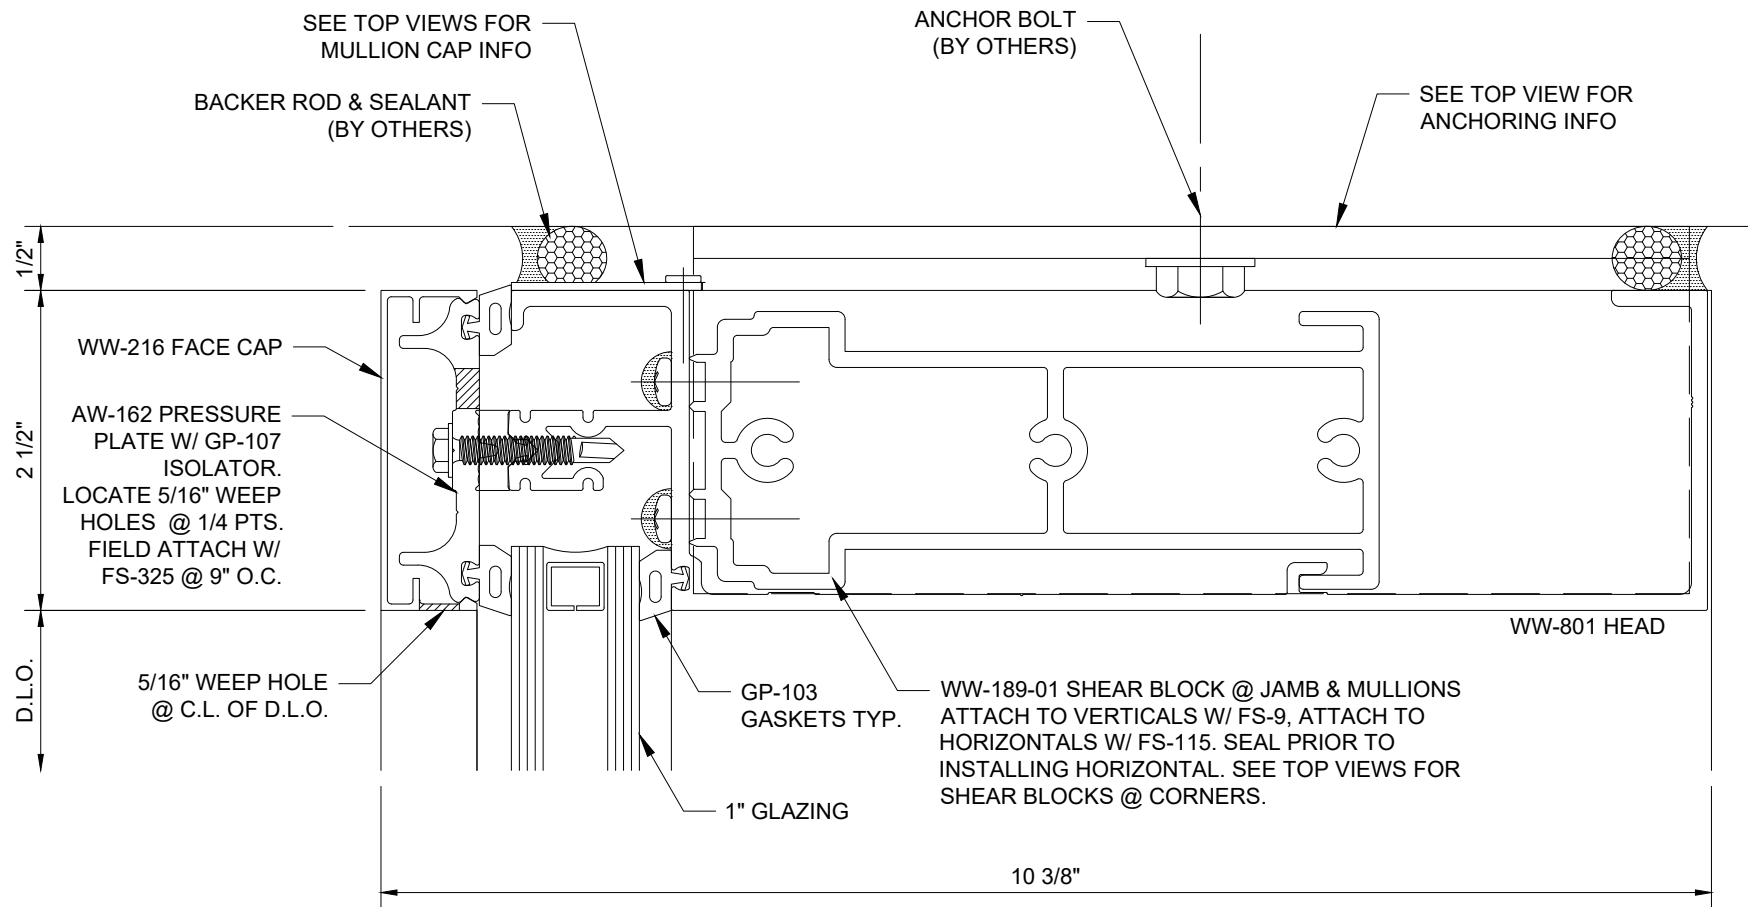


## Reliance™ Curtain Wall w/ FRP Pressure Plate Head - H3301

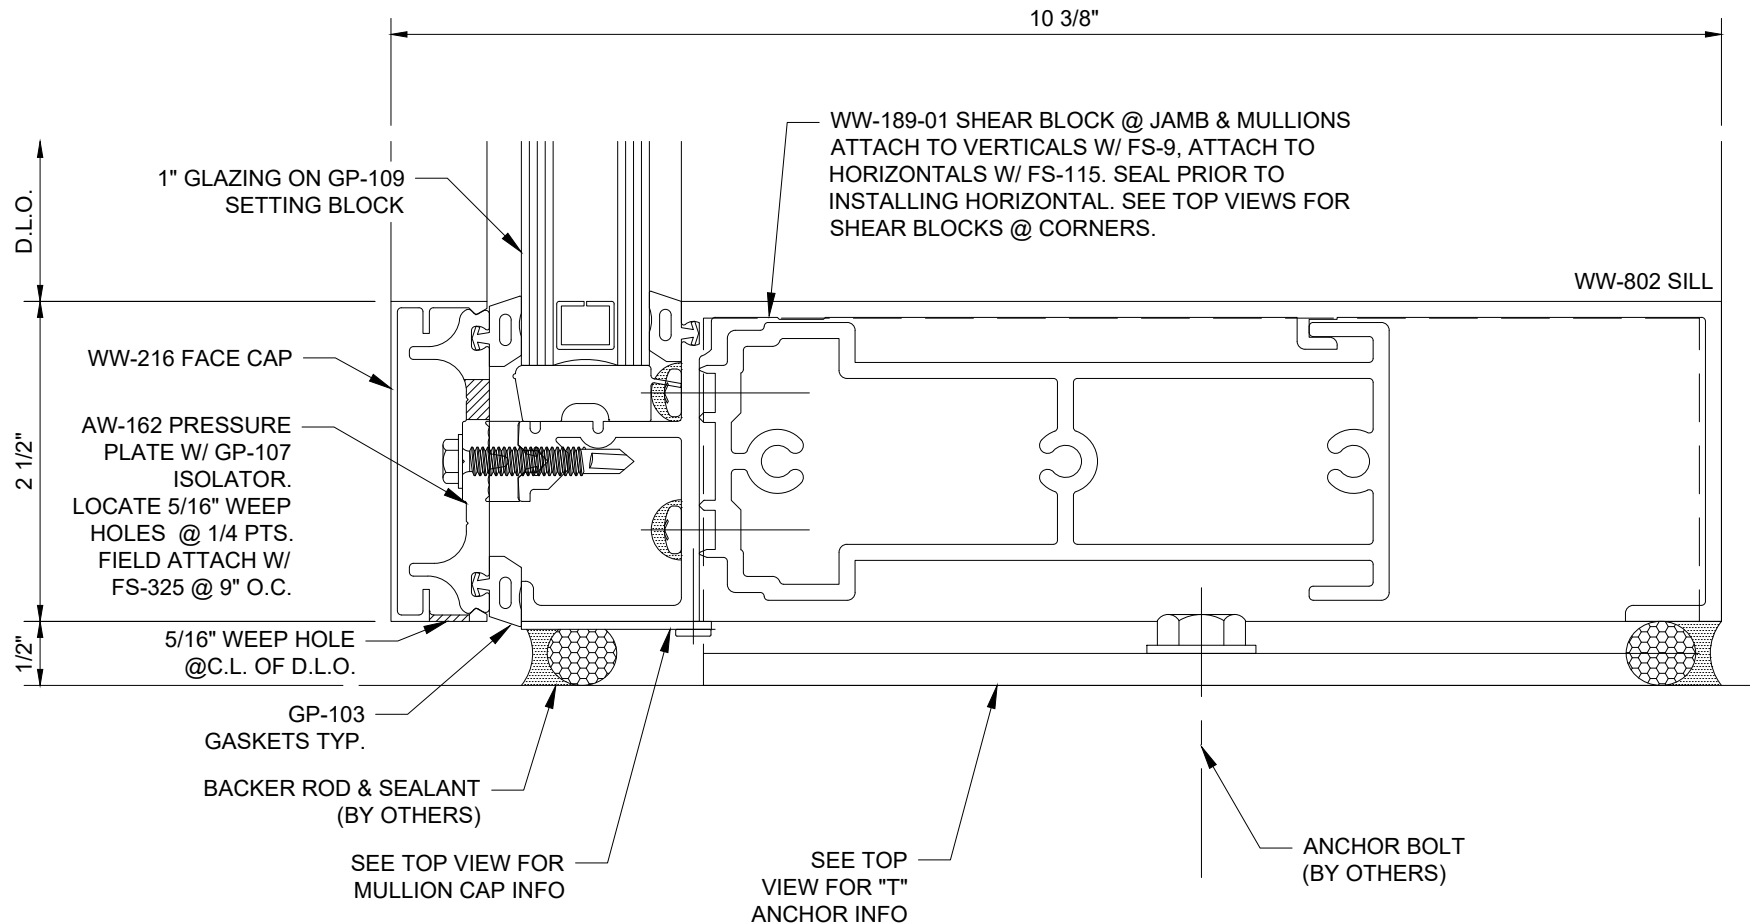


## Reliance™ Curtain Wall w/ FRP Pressure Plate Sill - H3304

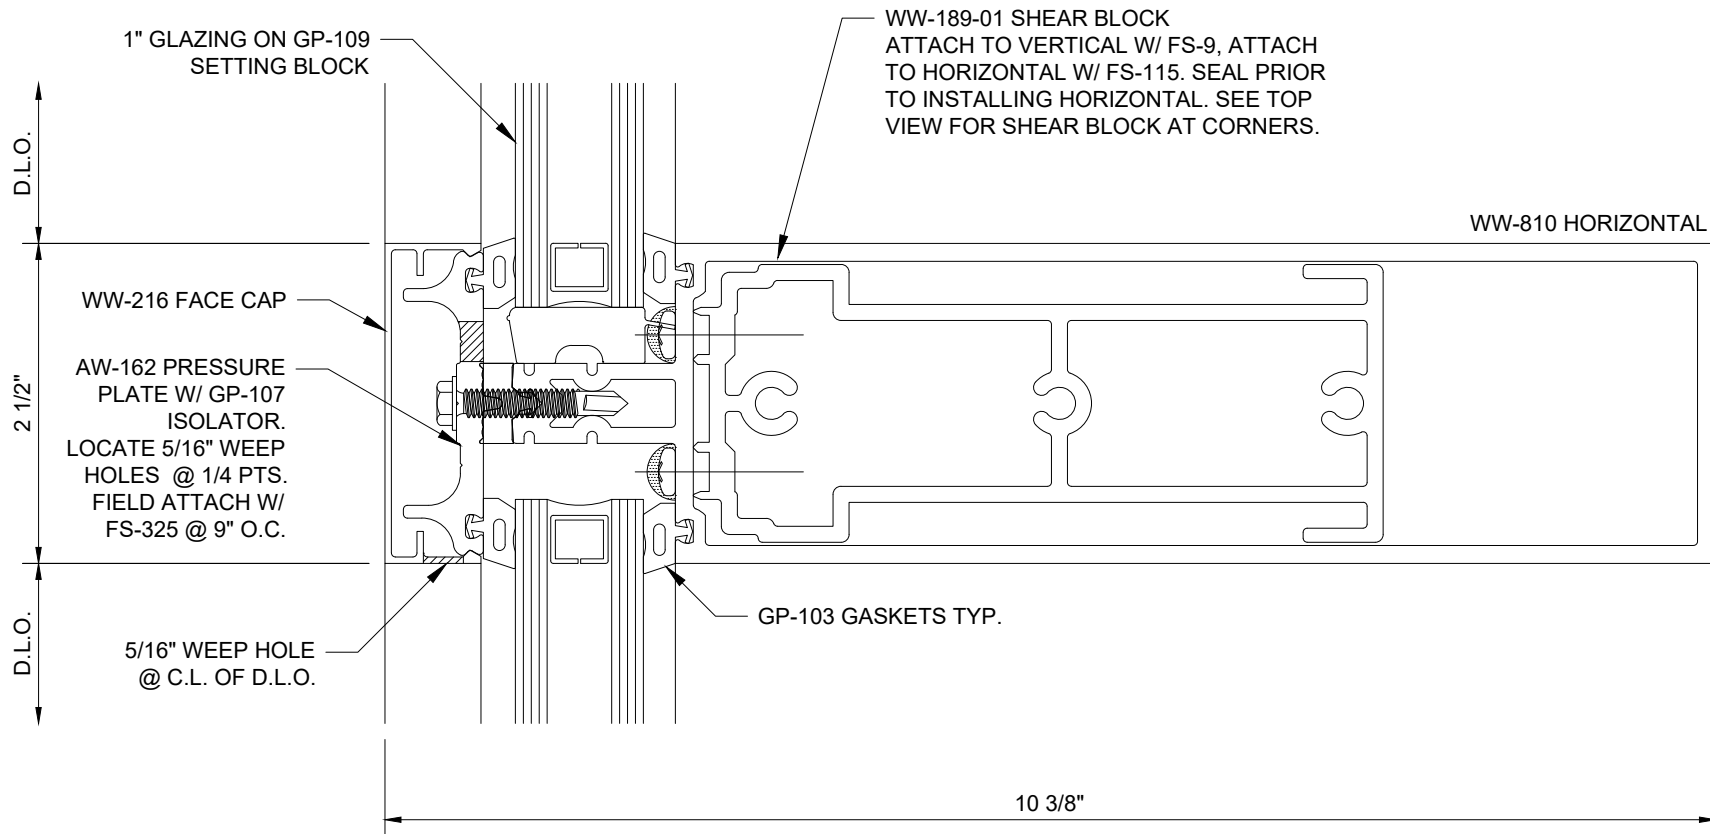


## Reliance™ Curtain Wall w/ FRP Pressure Plate Intermediate Horizontal - H3305

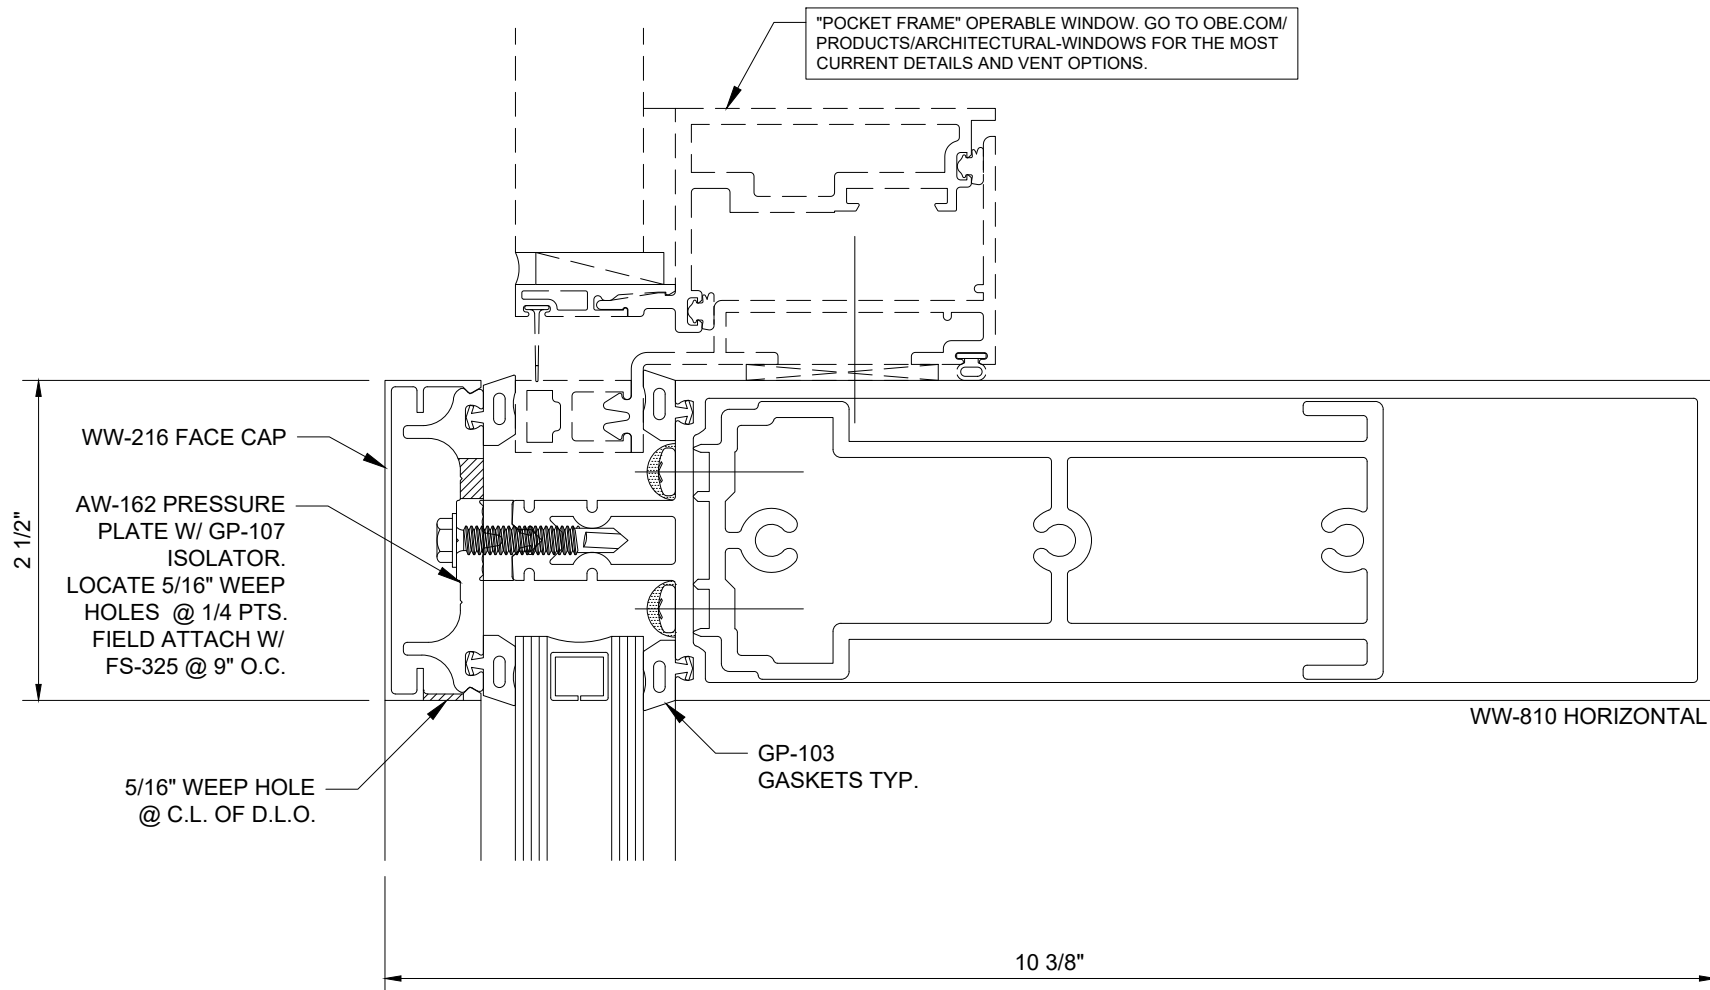


## Reliance™ Curtain Wall w/ FRP Pressure Plate Horizontal at Operable Window - Pocket Frame - H3318

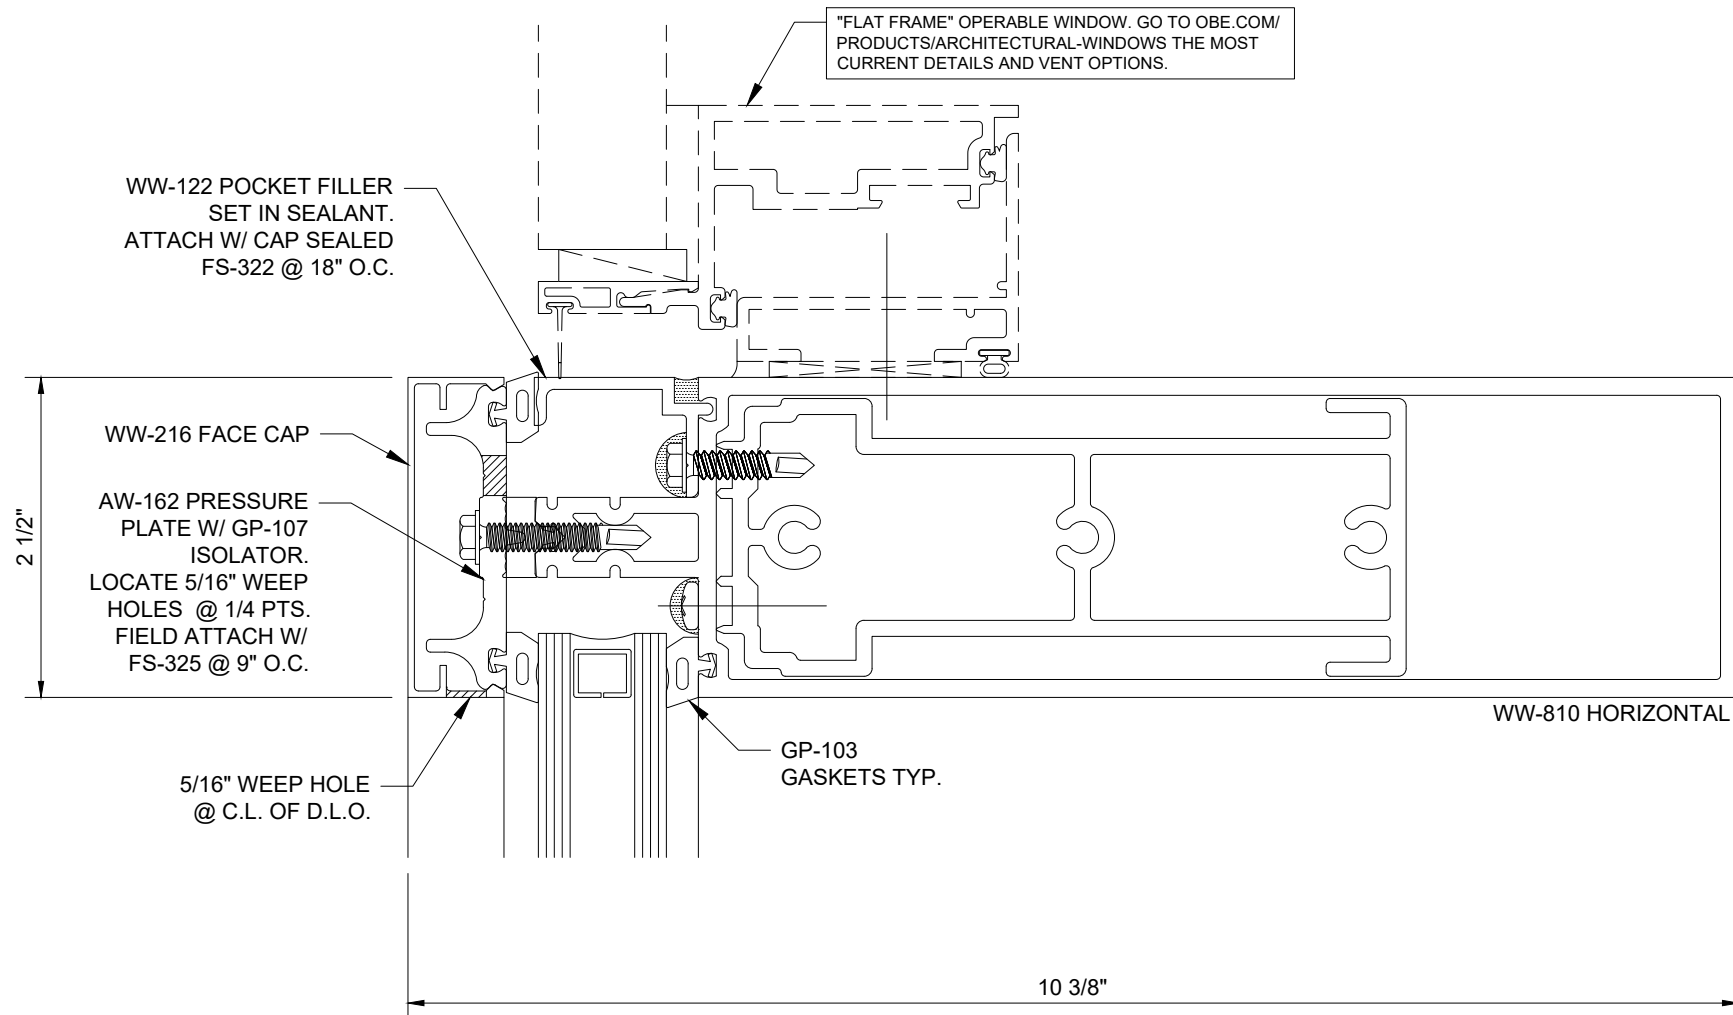

## Reliance™ Curtain Wall w/ FRP Pressure Plate Horizontal at Operable Window - Flat Frame - H3319

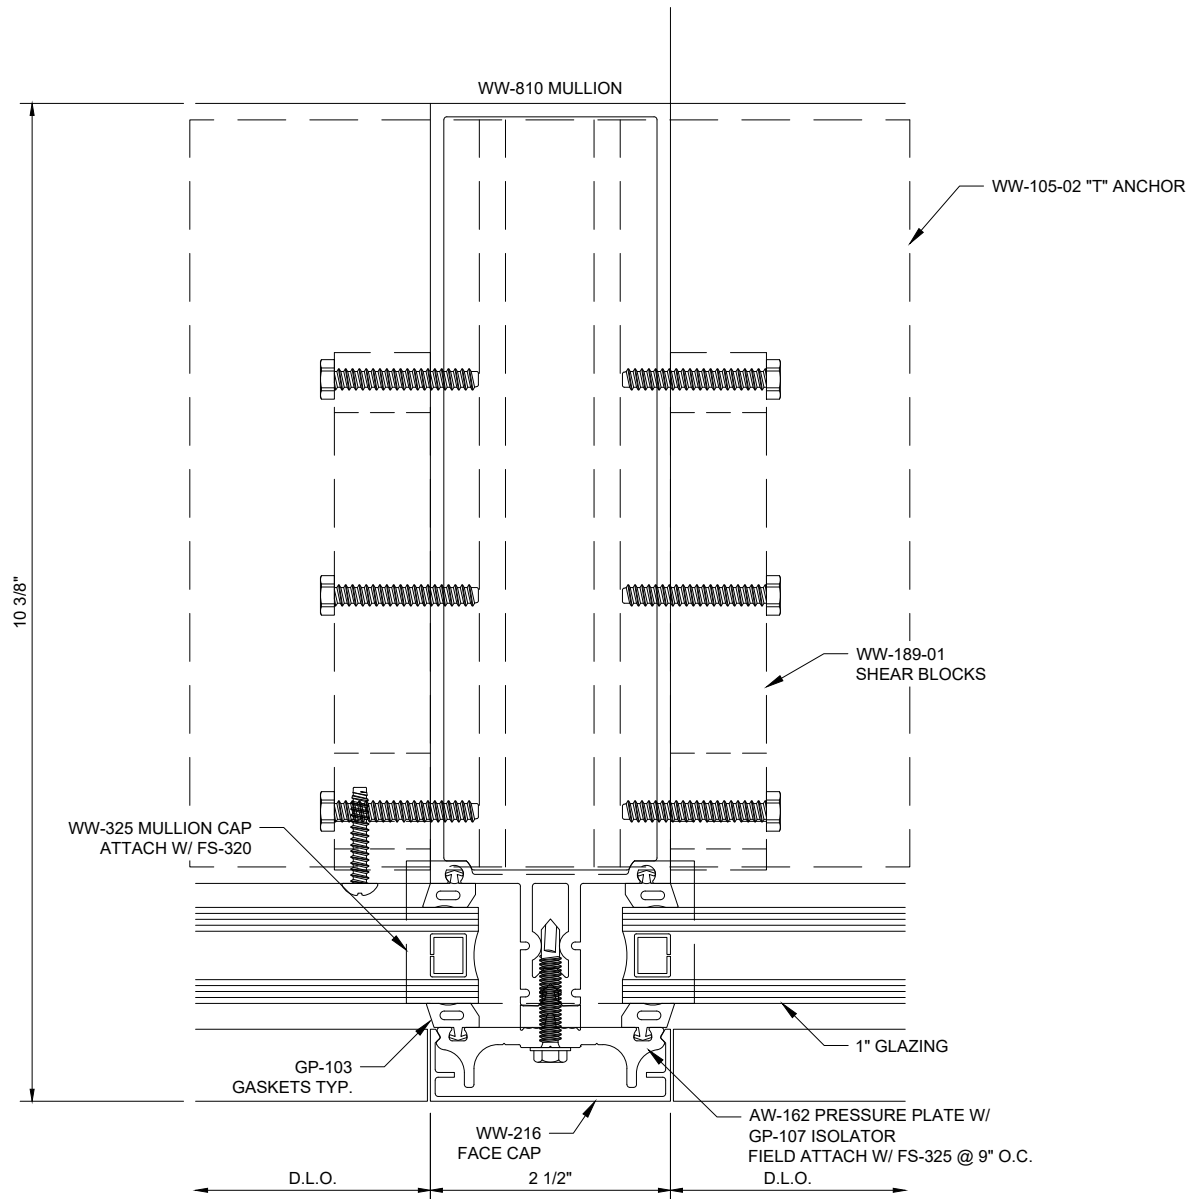


## Reliance™ Curtain Wall w/ FRP Pressure Plate Typical Vertical - V3302

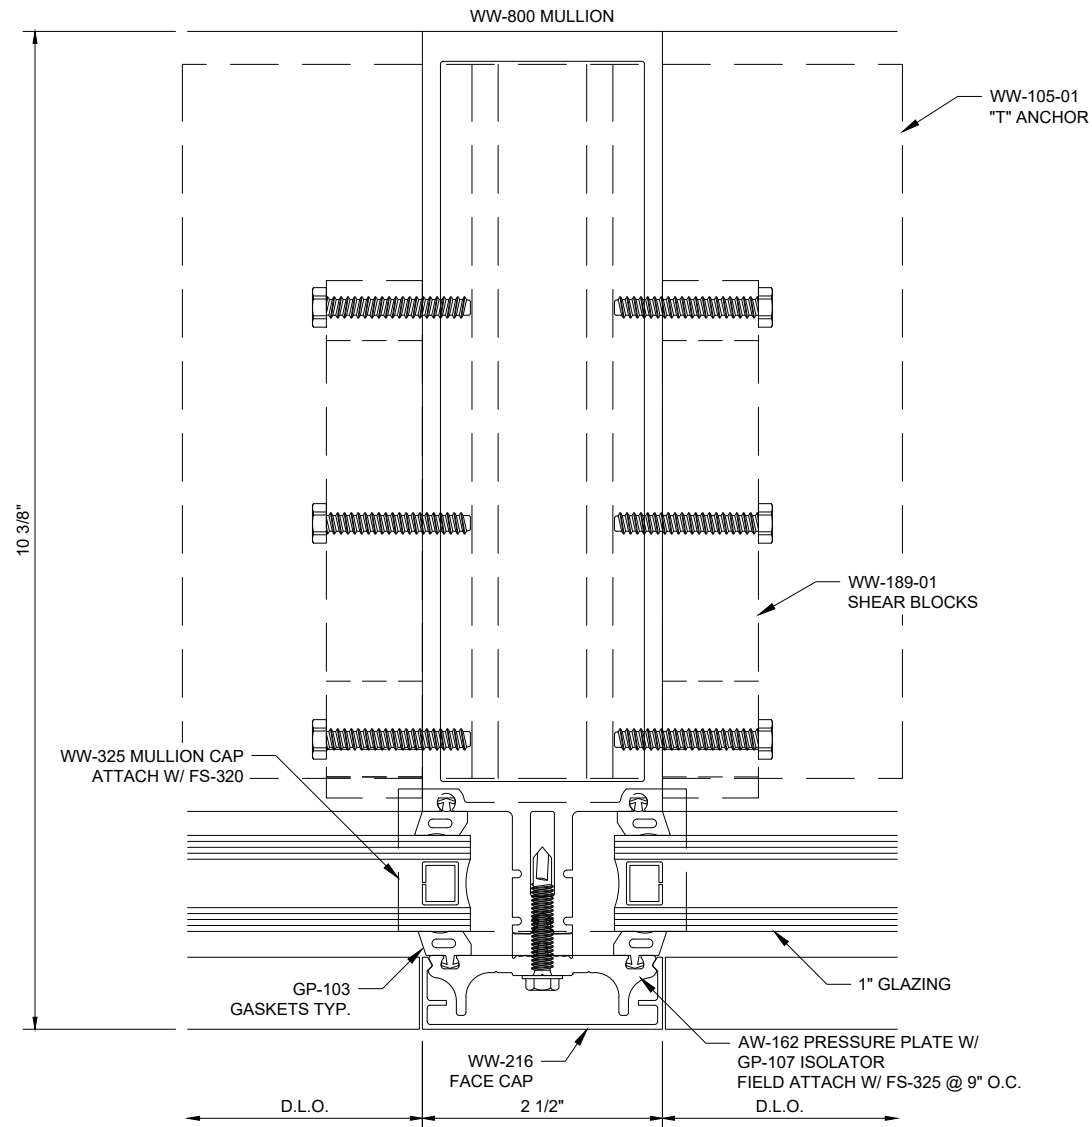


## Reliance™ Curtain Wall w/ FRP Pressure Plate Heavy Vertical - V3305




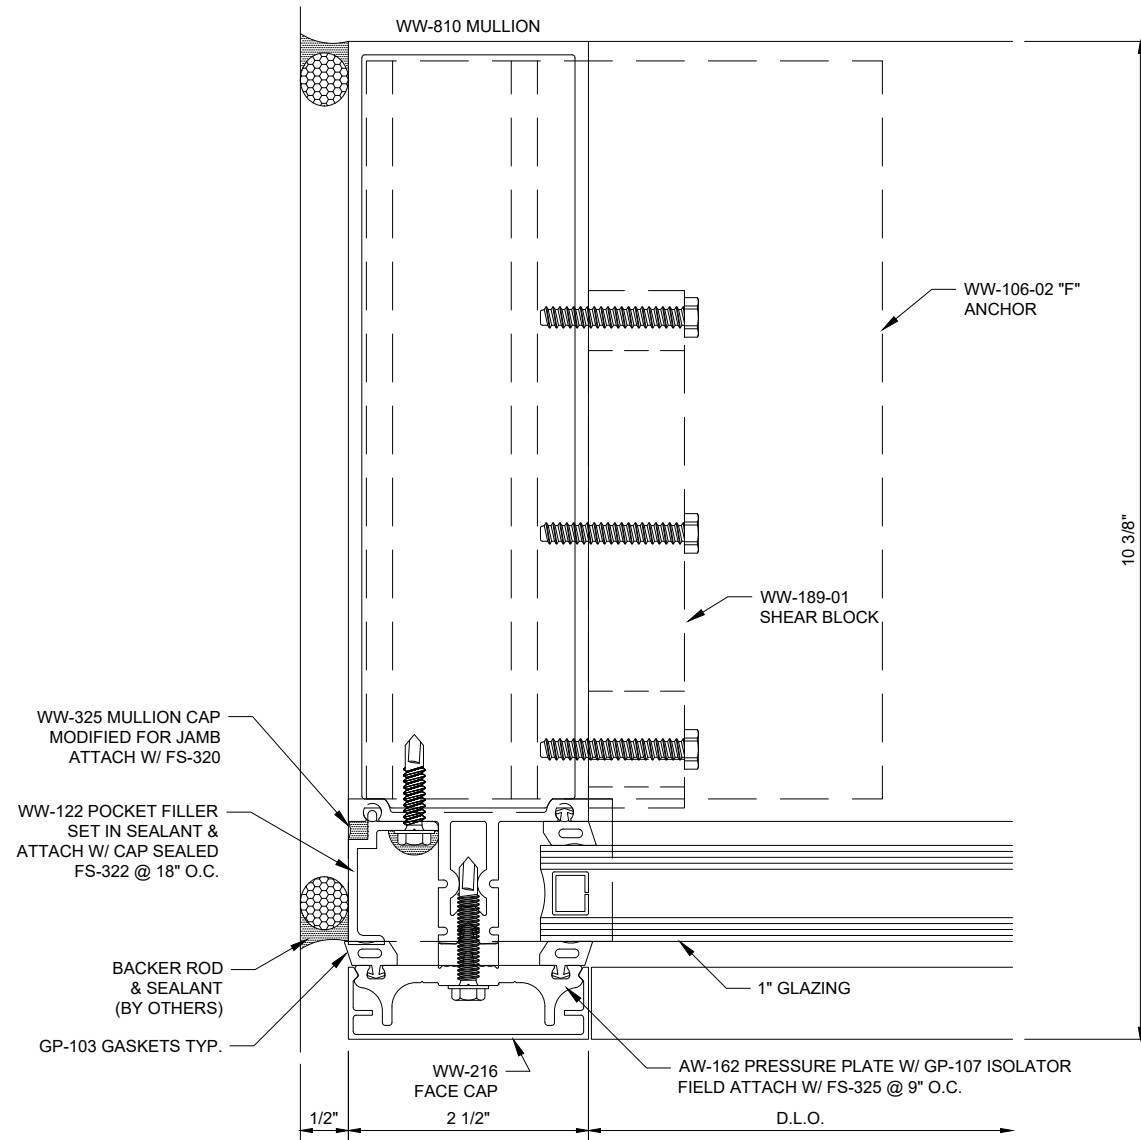


## Reliance™ Curtain Wall w/ FRP Pressure Plate Jamb - V3308

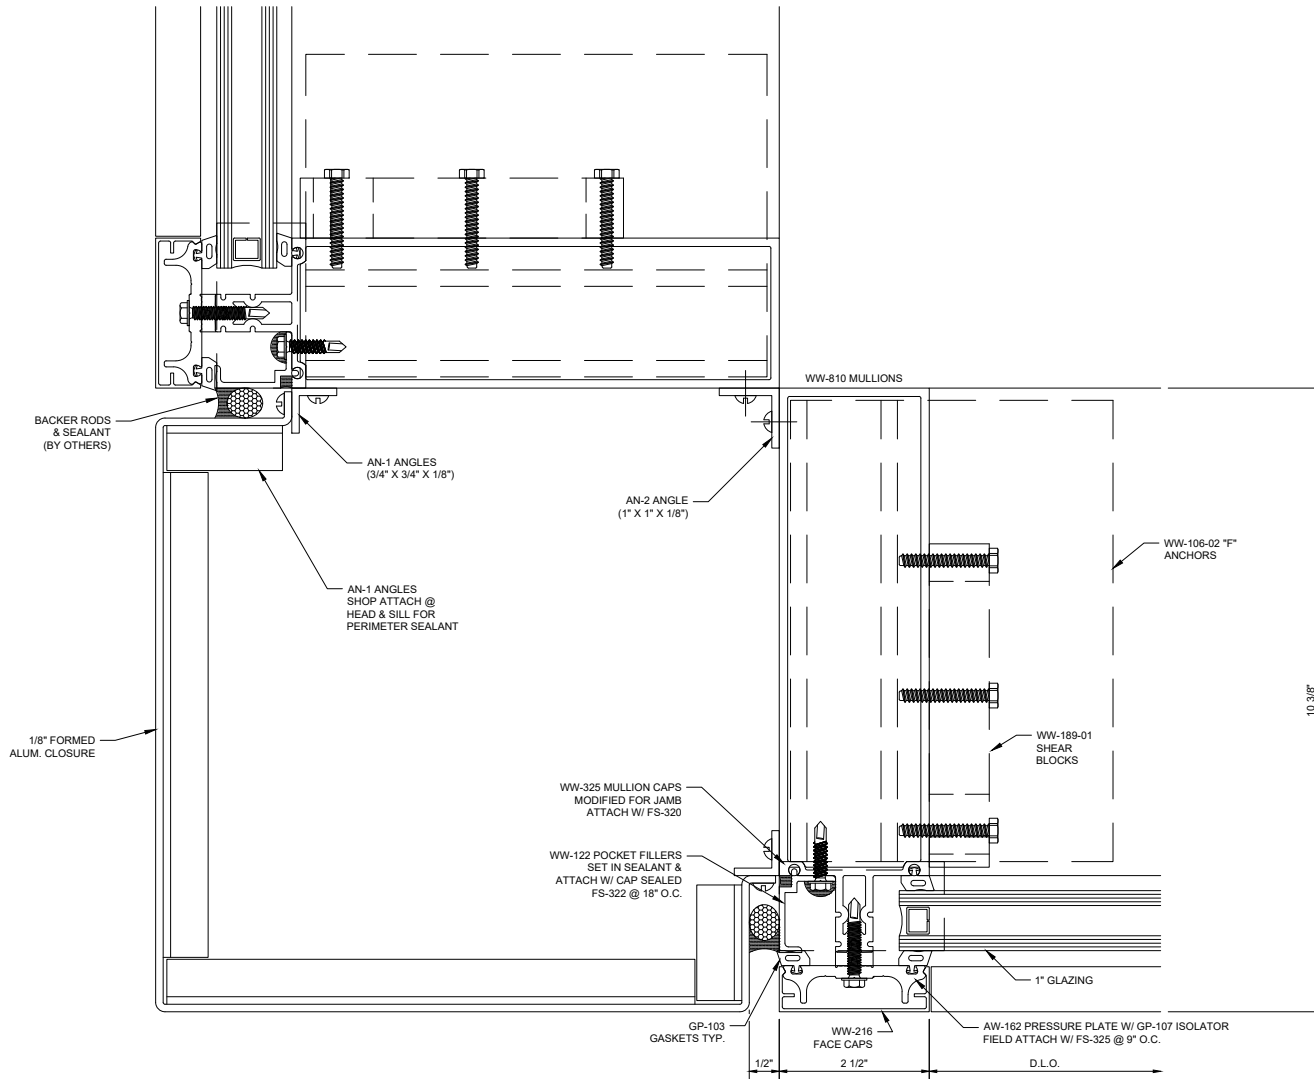


## Reliance™ Curtain Wall w/ FRP Pressure Plate 90° Outside Corner - 2 Mullion - V3315

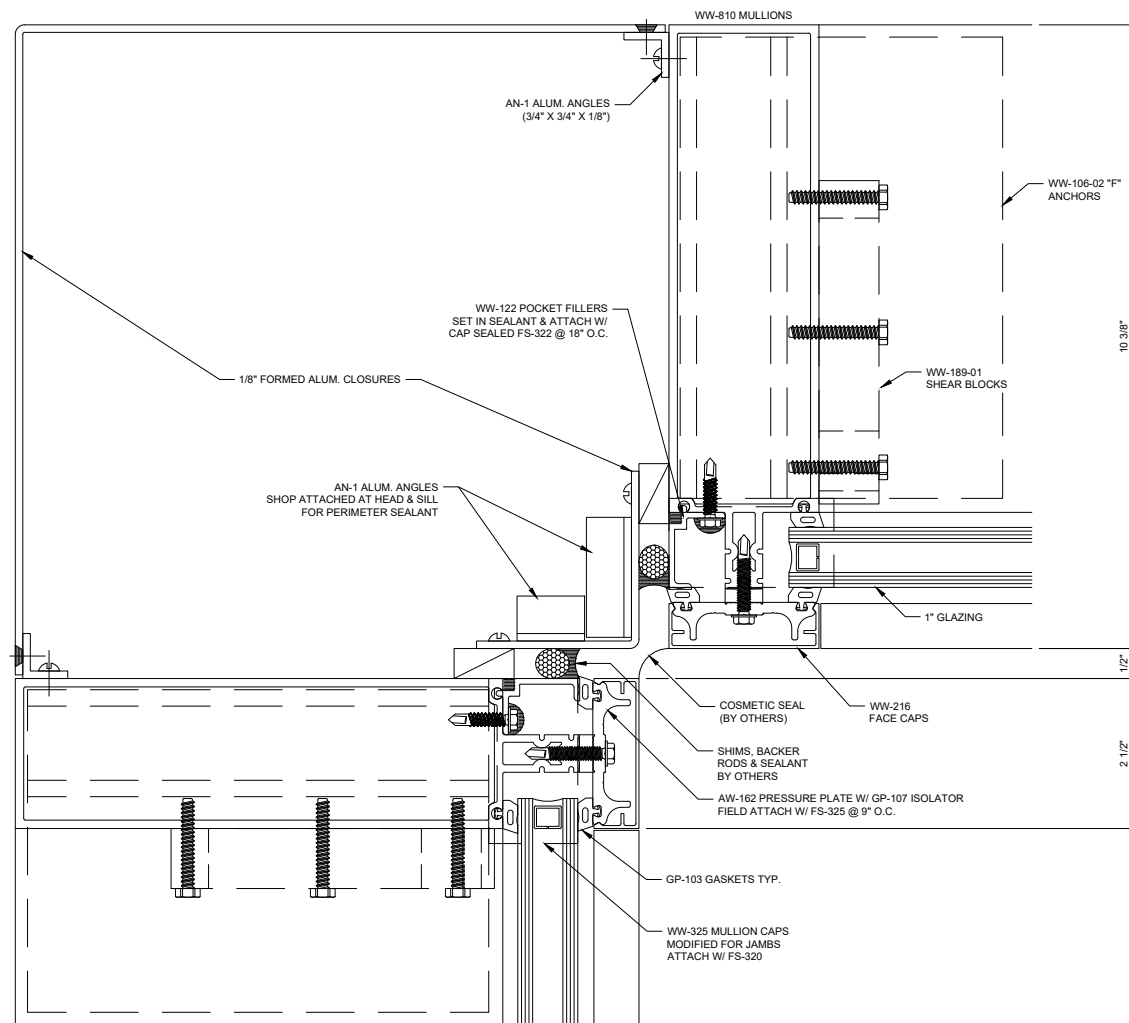


## Reliance™ Curtain Wall w/ FRP Pressure Plate 90° Inside Corner - 2 Mullion - V3317

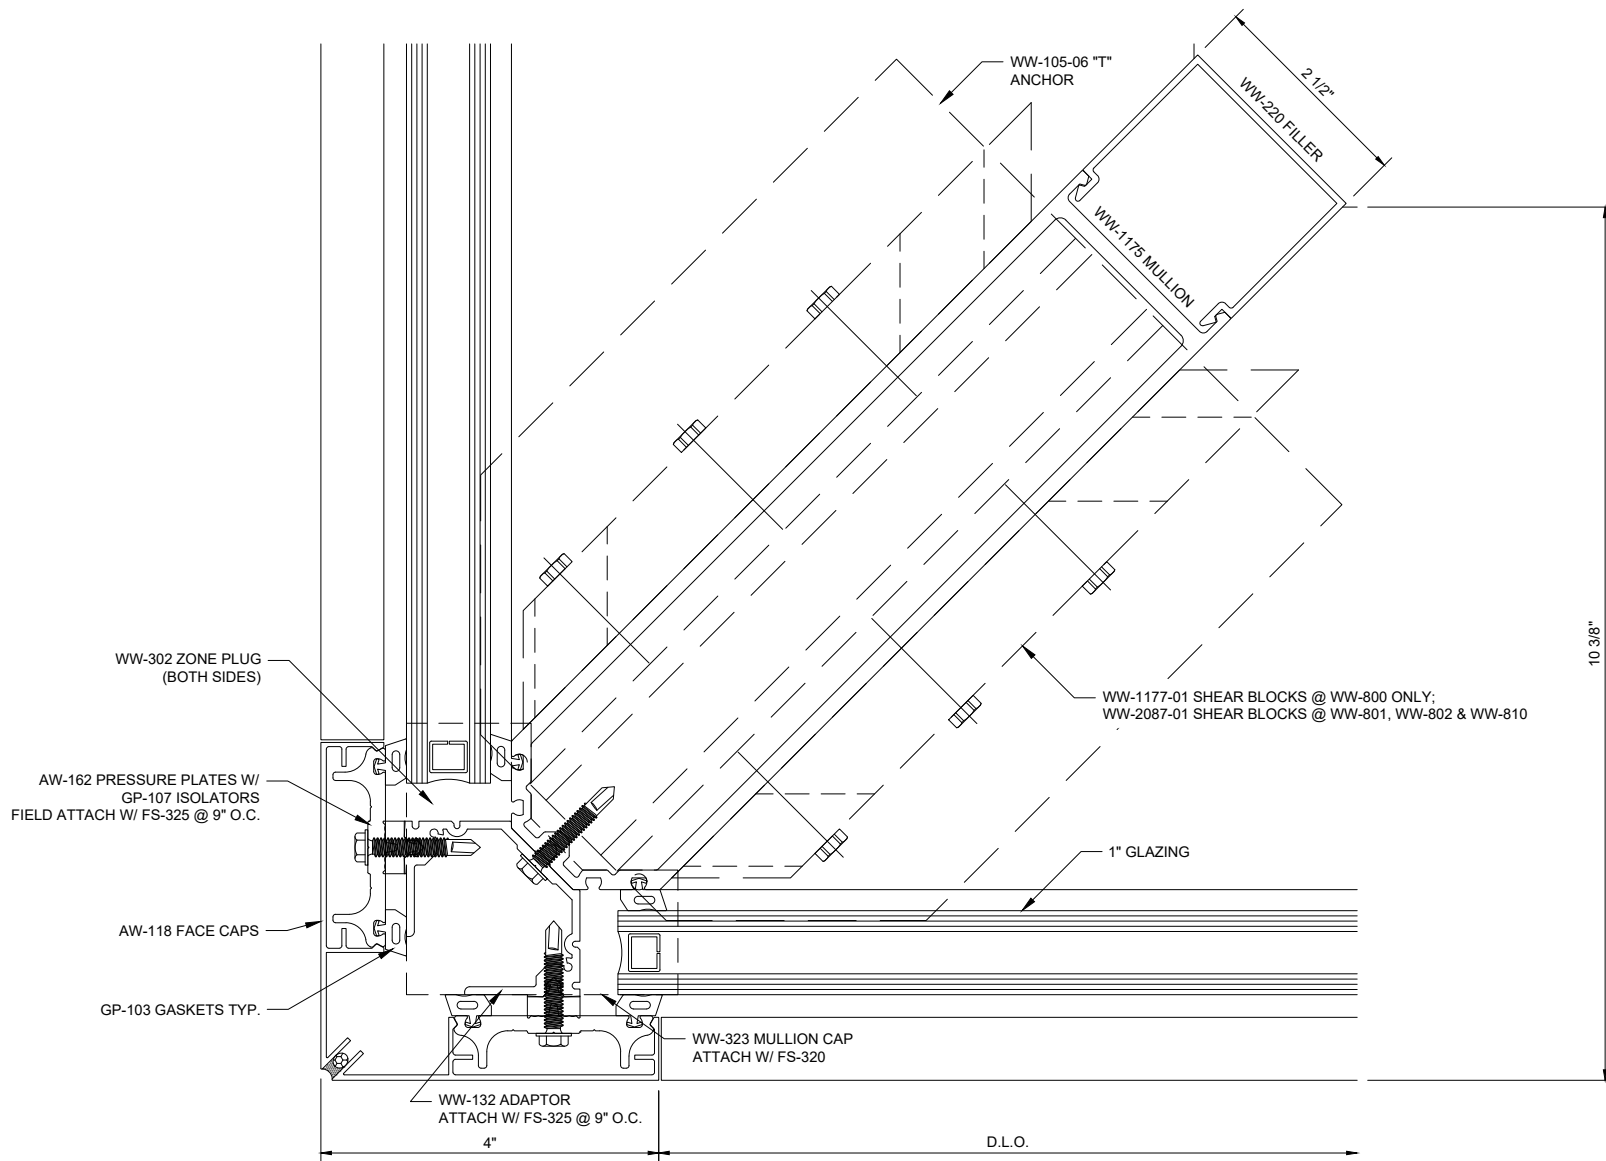

## Reliance™ Curtain Wall w/ FRP Pressure Plate 90° Outside Corner - V3321

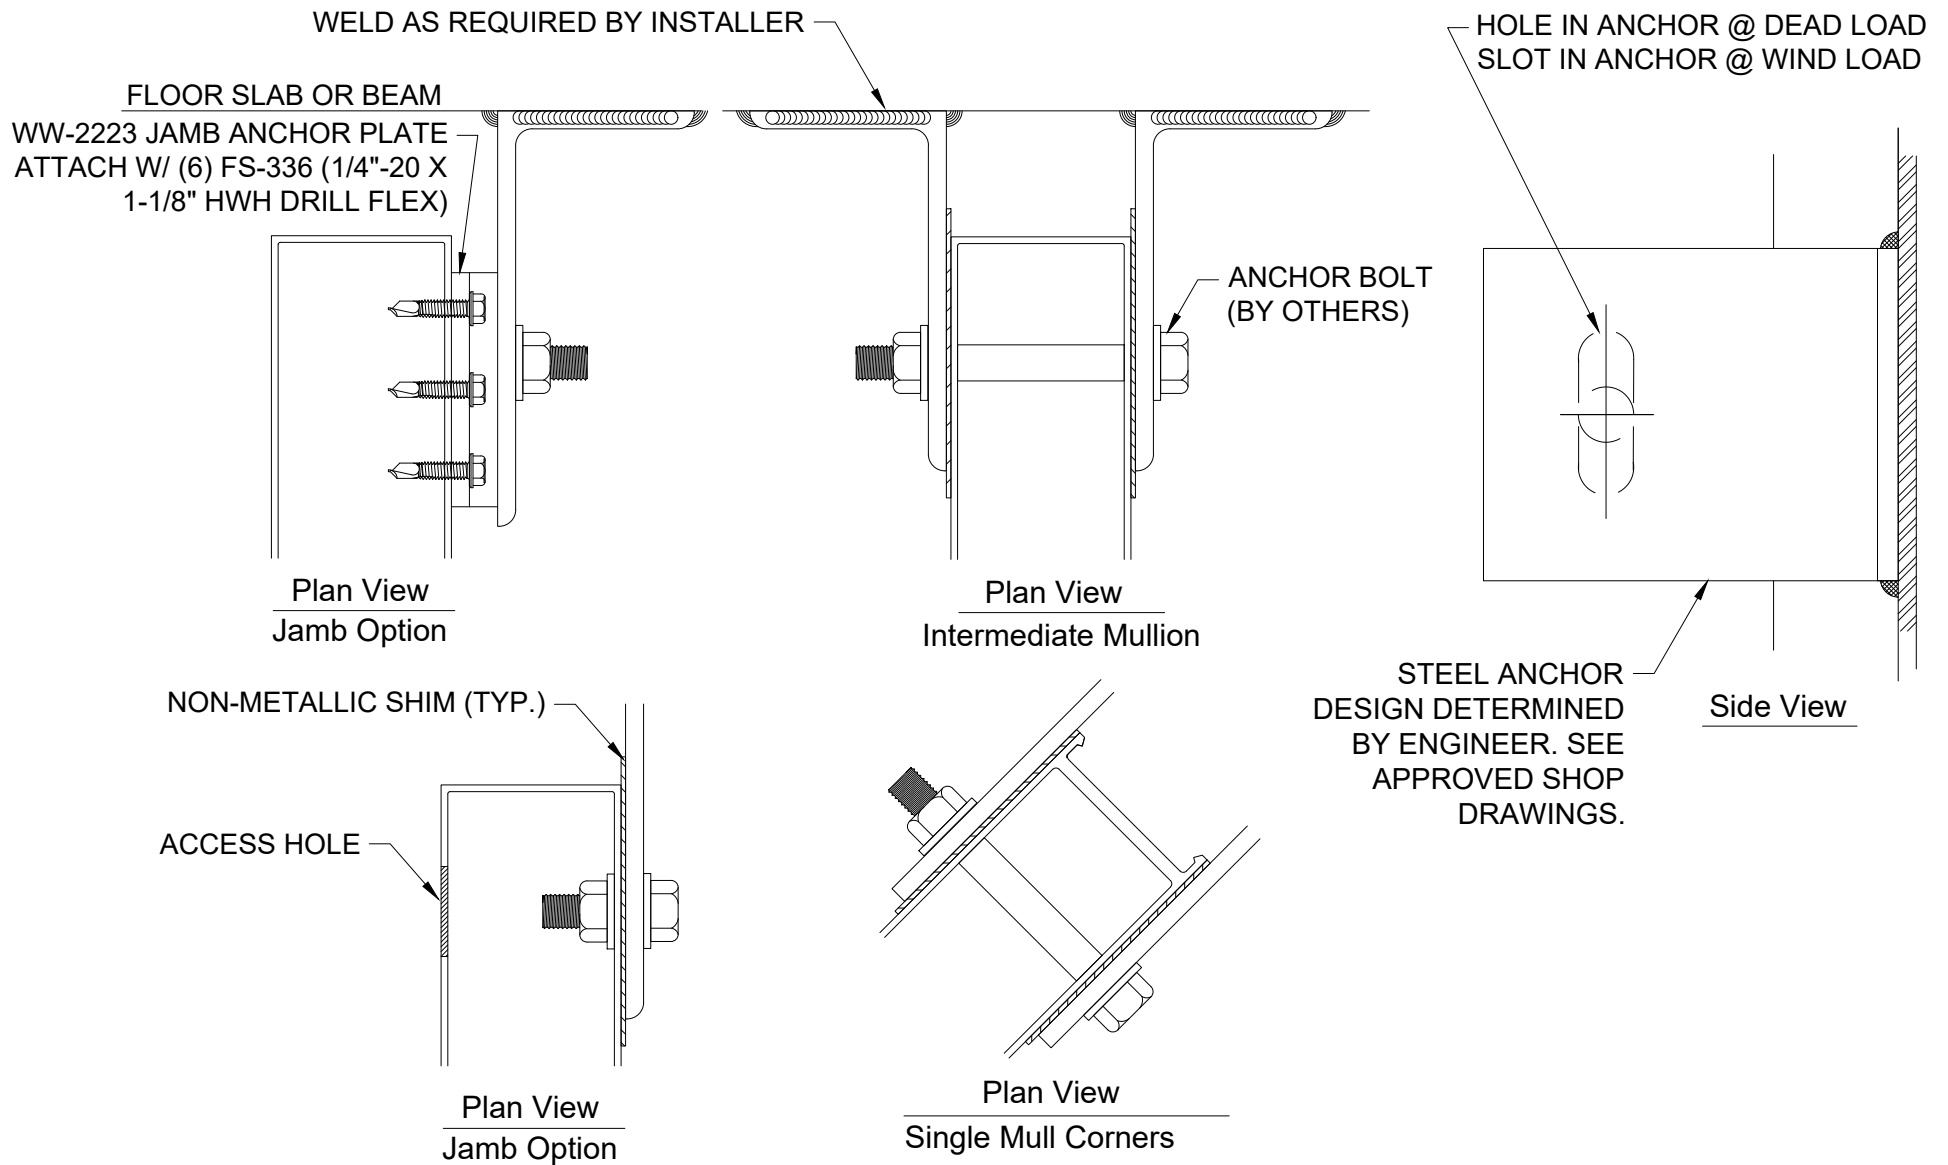


## Standard Curtain Wall Steel Anchoring - M0042

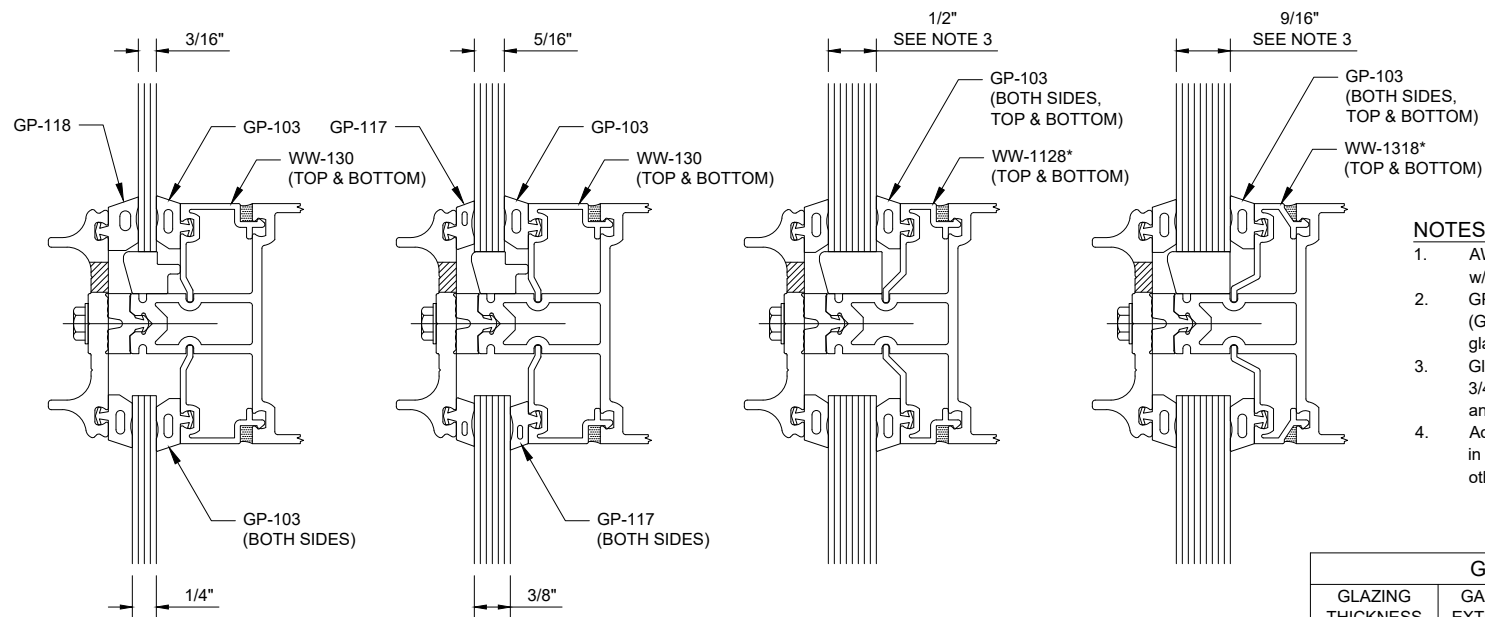

#### NOTES:


1. AW-162 FRP pressure plate w/ GP-107 isolator typical
2. GP-110 setting block typical, (GP-126 at 1/2" and 9/16" glazing)
3. Glass pocket with adaptor = 3/4" (1" glass pocket at 1/2" and 9/16" glazing)
4. Adaptors/glazing beads set in sealant (sealant by others).

GLASS CHART			
GLAZING THICKNESS	GASKET EXTERIOR	GASKET INTERIOR	GLAZING ADAPTOR
3/16" (.1875)	GP-118	GP-103	WW-130
1/4" (.250)	GP-103	GP-103	WW-130
5/16" (.3125)	GP-117	GP-103	WW-130
3/8" (.375)	GP-117	GP-117	WW-130
1/2" (.500)	GP-103	GP-103	*WW-112 8
9/16" (.5625)	GP-103	GP-103	*WW-131 8



JAMB


SEE GLASS CHART



90° OUTSIDE CORNER

SEE GLASS CHART


## Reliance™ Curtain Wall w/ FRP Pressure Plate Spandrel Glazing Options - M3146

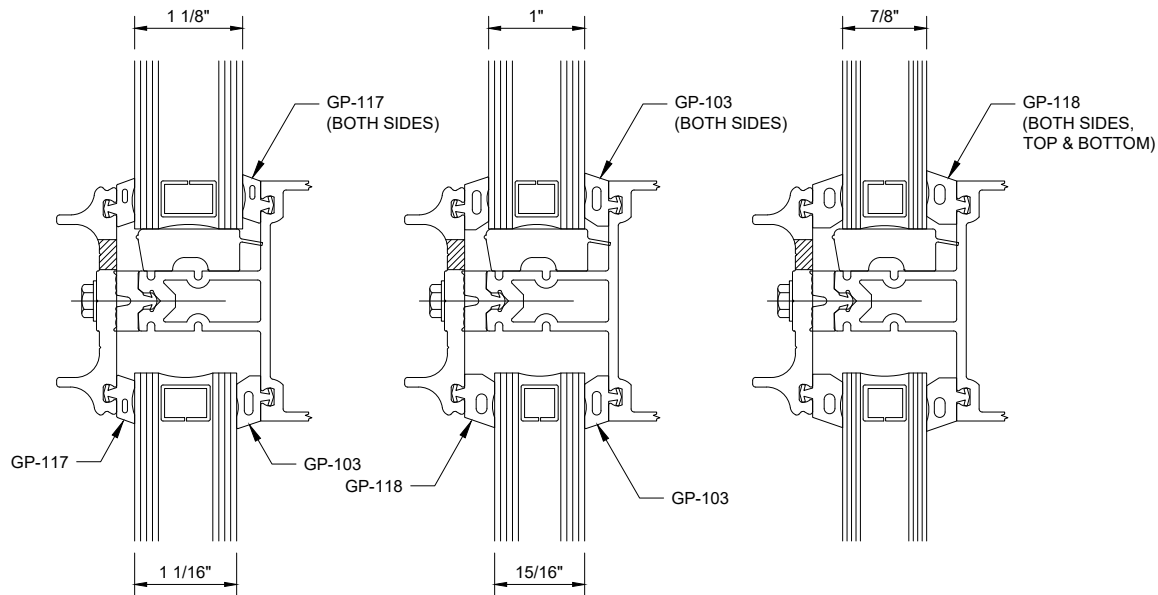


GLASS CHART		
GLAZING THICKNESS	GASKET EXTERIOR	GASKET INTERIOR
7/8" (0.875)	GP-118	GP-118
15/16" (0.9375)	GP-118	GP-103
1"	GP-103	GP-103
1-1/16" (1.0625)	GP-117	GP-103
1-1/8" (1.125)	GP-117	GP-117

#### NOTES:

1. AW-162 FRP pressure plate w/ GP-107 isolator typical
2. GP-109 setting block typical
3. Glass Pocket = 1-1/2" (typical)

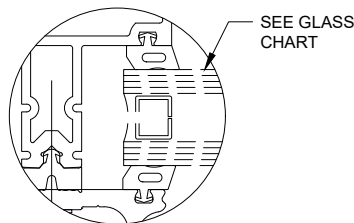


VERTICAL  
MULLION

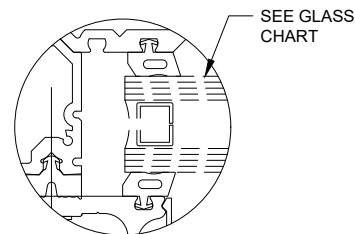

90° OUTSIDE  
CORNER

## Reliance™ Curtain Wall w/ FRP Pressure Plate Vision Glazing Options - M3148

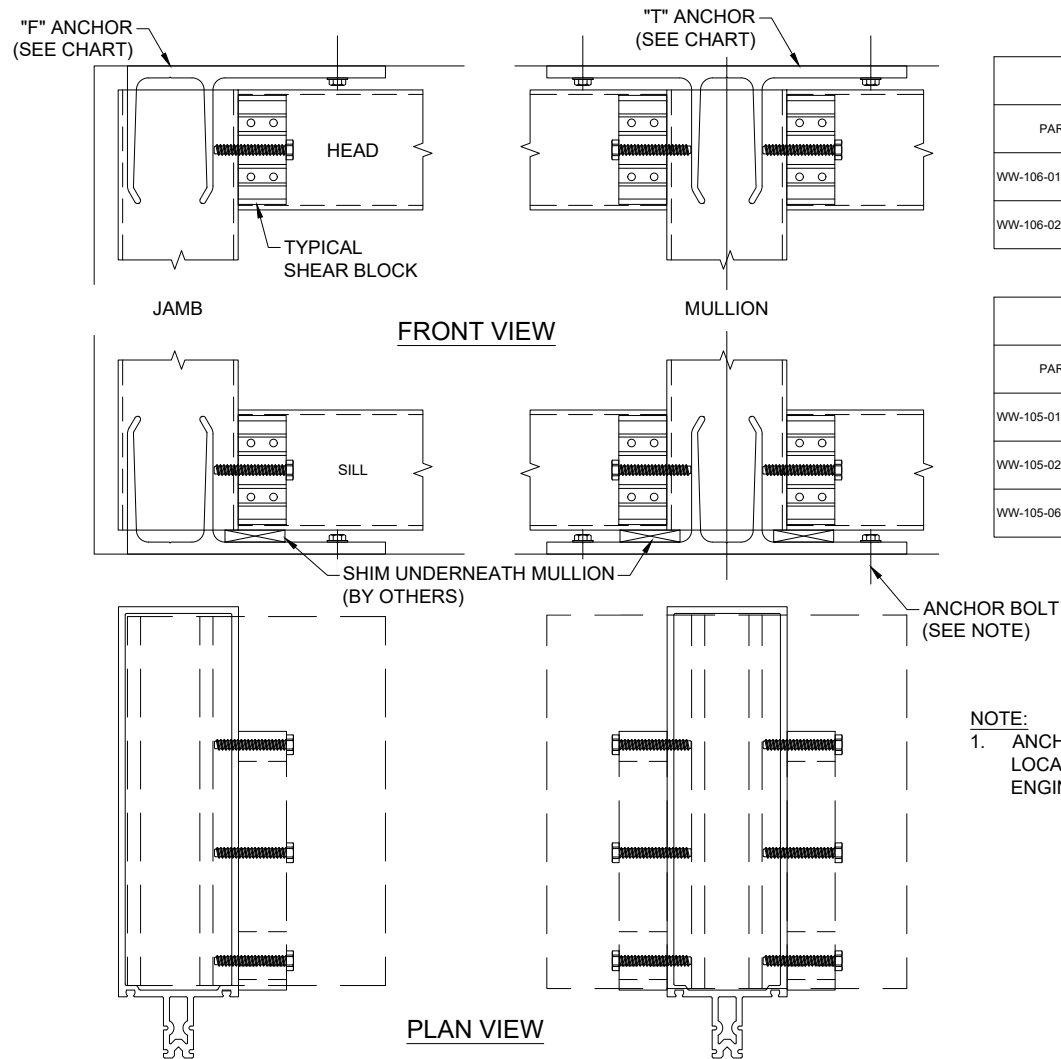

"F" ANCHOR CHART	
PART NO.	MULLION
WW-106-01	WW-800 / WW-804 / WW-850
WW-106-02	WW-810


"T" ANCHOR CHART	
PART NO.	MULLION
WW-105-01	WW-800 / WW-804 / WW-850
WW-105-02	WW-810
WW-105-06	WW-1175 (90° OUTSIDE CORNER)

**NOTE:**  
1. ANCHOR BOLT SIZE, QUANTITY AND LOCATION DETERMINED BY STRUCTURAL ENGINEER


## Reliance™ Curtain Wall "F" & "T" Anchors - M3625



WW-810 MULLION

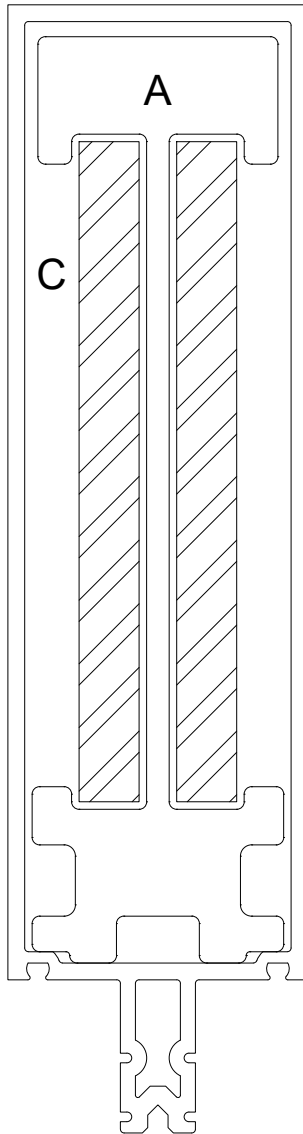

WW-800 / WW-804 MULLION

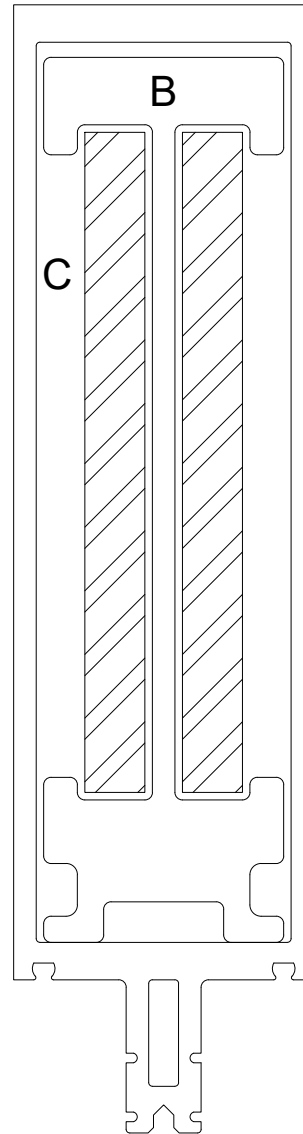





STEEL REINFORCING CHART

A	WW-209 ALUM. REINFORCING
B	WW-201 ALUM. REINFORCING
C	RS-20 (5-1/2" X 1/2" X 10' LG. STEEL BAR

SEE APPROVED SHOP DRAWINGS FOR SPECIFIC REQUIREMENTS.

REF. INSTALLATION MANUAL FOR ADDITIONAL INFO.

# Reliance™ Curtain Wall Steel Reinforcement - M3630

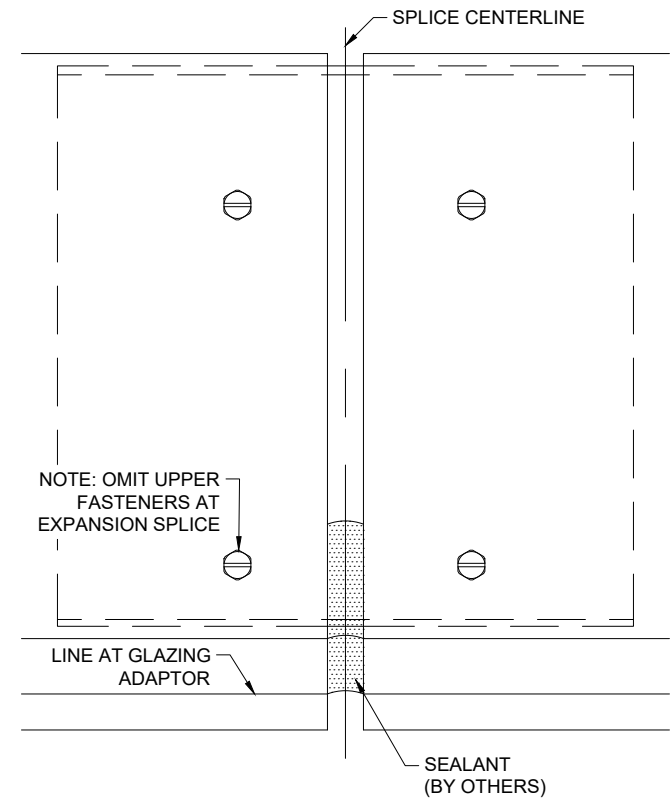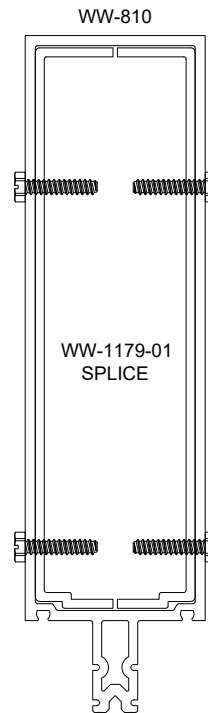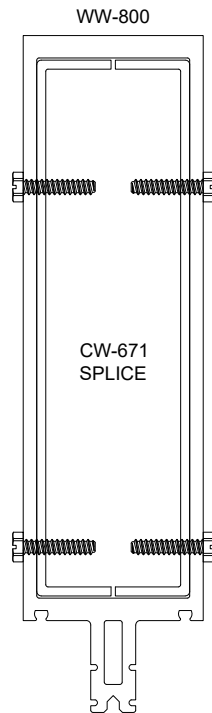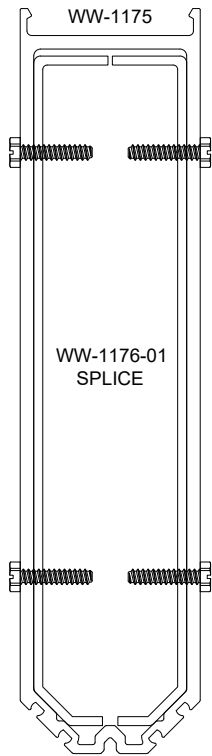

10-1/8" SYSTEM DEPTH	
MULLION	SPLICE
WW-800	CW-671
WW-810	WW-1179-01
WW-1175	WW-1176-01

REFERENCE INSTALLATION MANUAL FOR ADDITIONAL SPLICE INFO.

## Reliance™ Curtain Wall Mullion Splice - M3643